


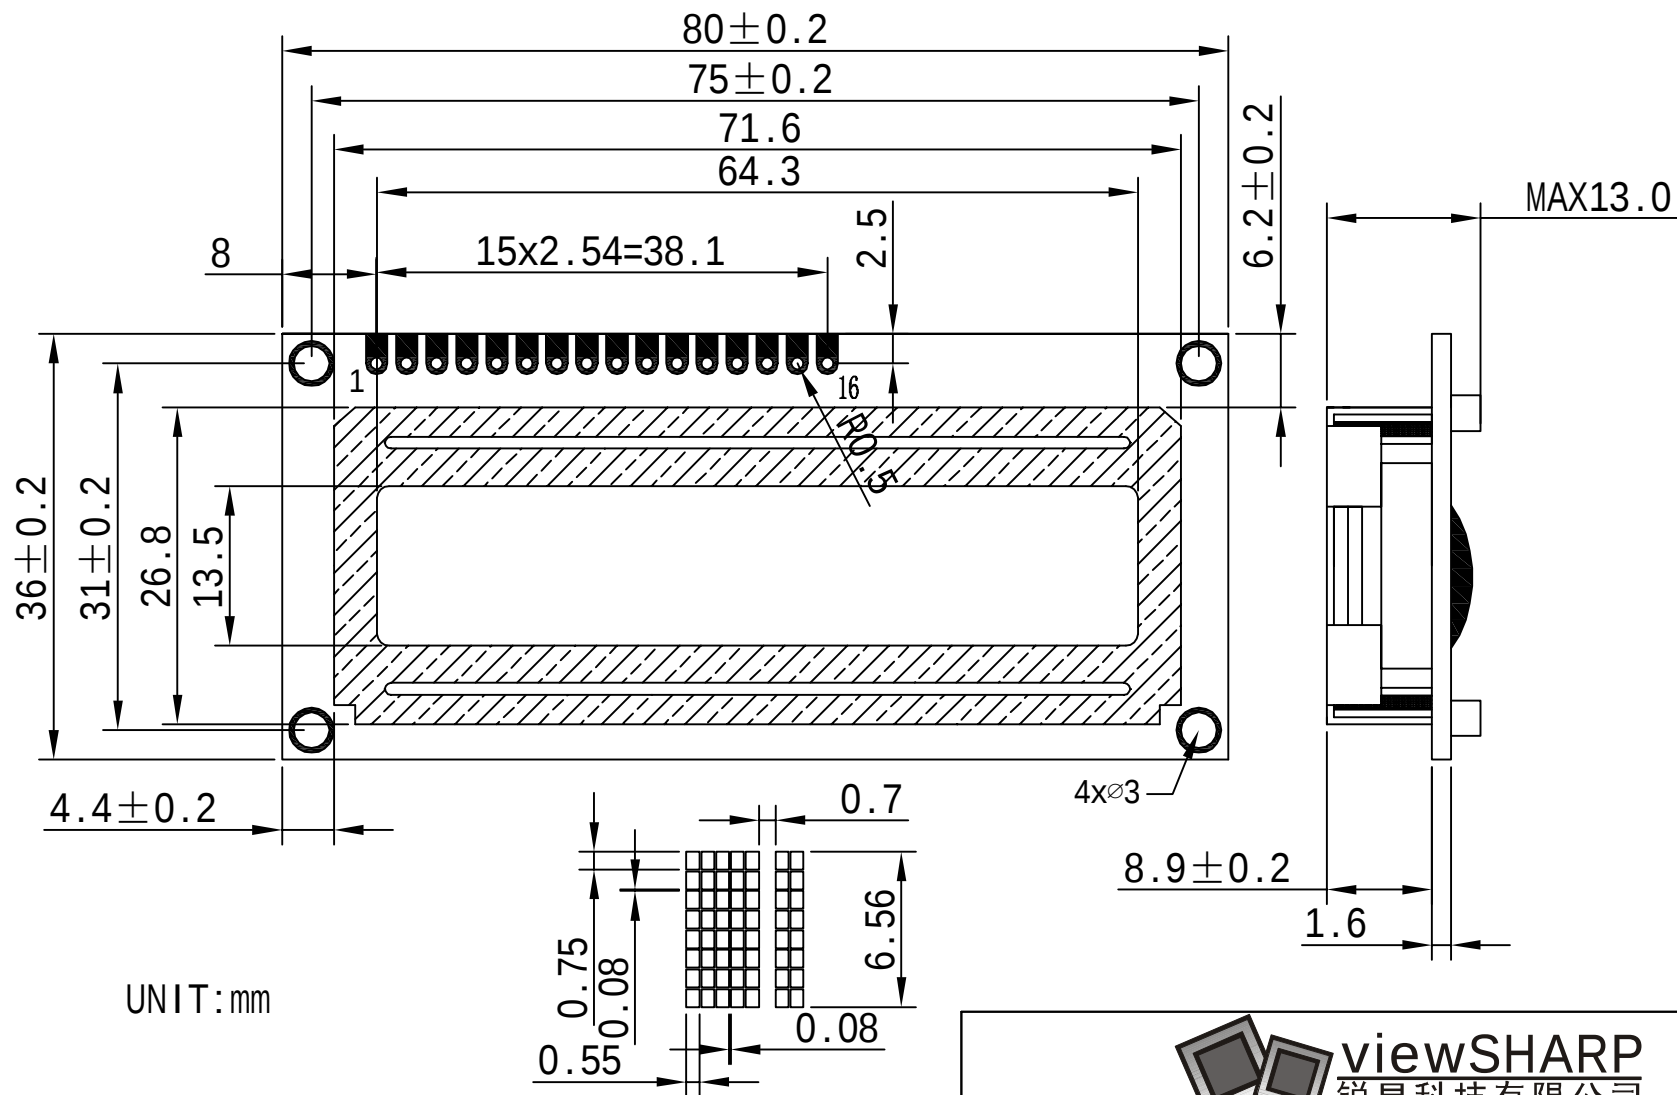

Pin Definition

1	2	3	4	5	6	7	8	9	10	11	12	13	LCM Mode	VS1601	Control IC	0066
VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	Dispaly Type	STN蓝/黄绿	Viewing Direction	6'CLOCK
14	15	16											Operating Voltage		3.3V or 5V	
DB7	BL+	BL-											Supply Current		15MA to 50MA	
													Operating Temp		-20°c to 70°c	