


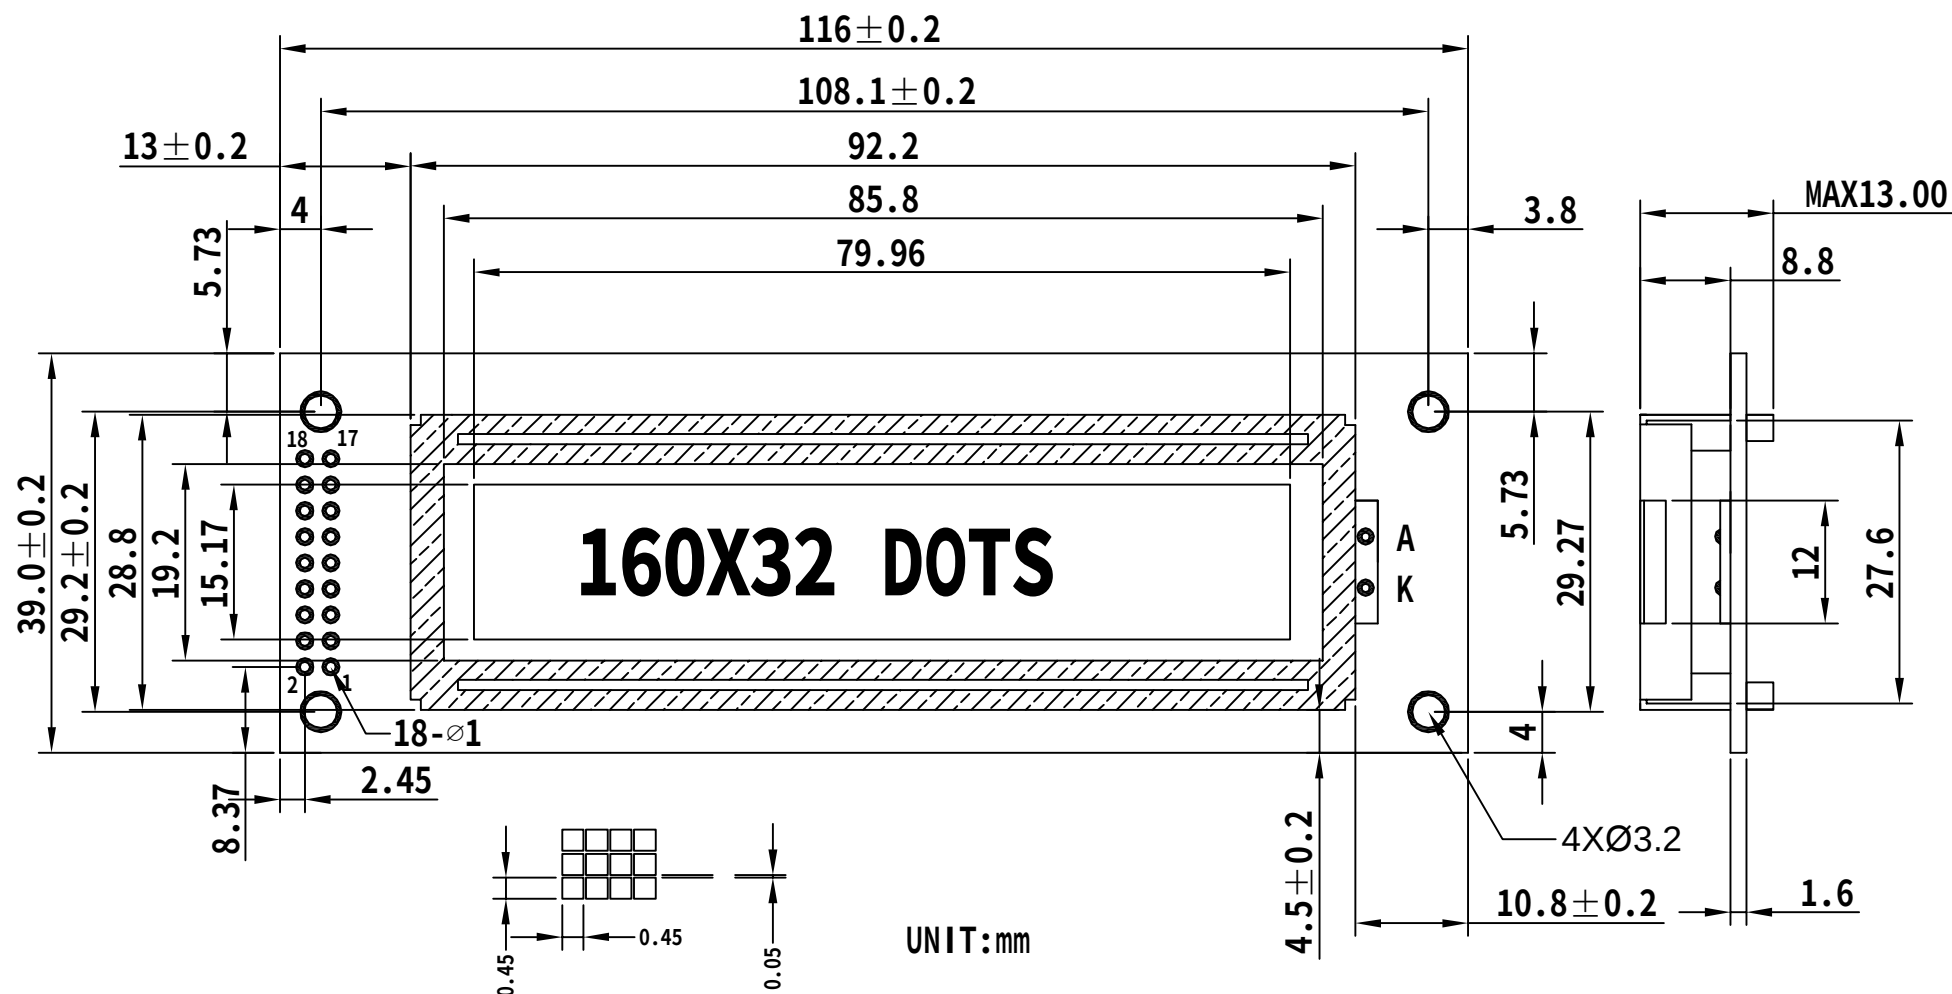

Pin Definition

1	2	3	4	5	6	7	8	9	10	11	12	13	LCM Mode	VS16032C-1	Control IC	ST7920
VSS	VDD	VO	RS (CS)	RW (SID)	E (SCLK)	DB0	DB1	DB2	DB3	DB4	DB5	DB6	Dispaly Type	STN蓝/黄绿	Viewing Direction	6'CLOCK
14	15	16	17	18									Operating Voltage	3.3V or 5V		
DB7	RST	PSB	BL+	BL-									Supply Current	20MA to 80MA		
													Operating Temp	-20°c to 70°c		