



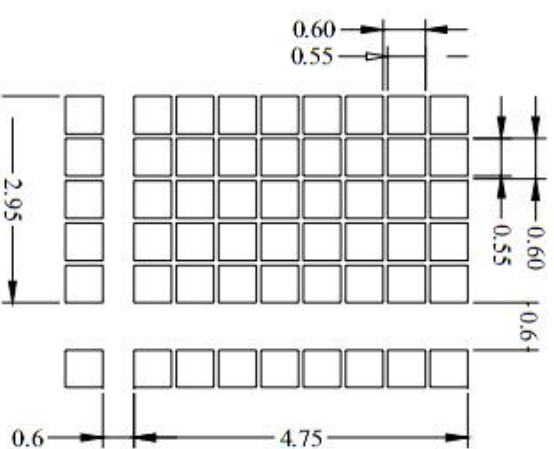

	H1	H2
LED B/L TYPE	9.0	14.5MAX
EL B/L & NO B/L TYPE	5.4	10.0MAX

Pin Definition

1	2	3	4	5	6	7	8	9	10	11	12	13
VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6
14	15	16										
DB7	BL+	BL-										

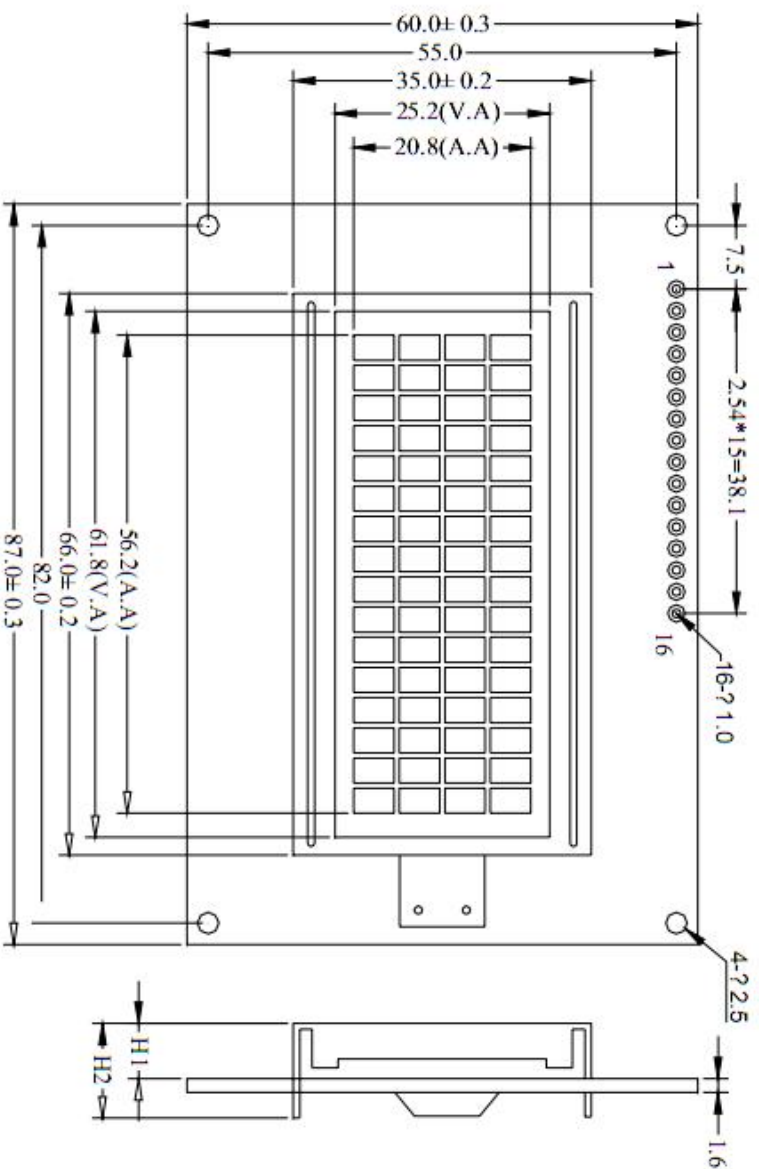

LCM Mode	VS1604	Control IC	0066
Display Type	STN 蓝/黄绿	Viewing Direction	6'CLOCK
Operating Voltage	3.3V or 5V		
Supply Current	15MA to 50MA		
Operating Temp	-20° c to 70° c		